



Technical Data Sheet


INDIAQUA –SP 200

Water-based cleaning medium for the removal of fluxes from solder pallets ,carriers, fingers and condensation traps

Product Description

Designed for manual, ultrasonic and spray-in-air systems, INDIAQUA-SP 200 stencil cleaner offers great cleaning performance with much lower environmental impact. Effectively removes all types of Flux residue and even solder paste (e.g. water-based, RMA, no-clean, lead-free) Pallets, Carriers , Fingers, stencils and Condensation Traps.

INDIAQUA –SP 200 has been proven compatible with many metals, Polymers and epoxy surface .

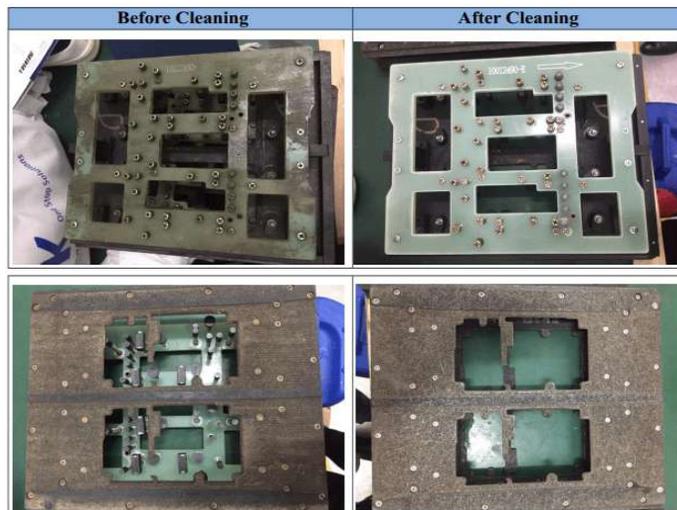



Features

- ✦ Consistently good cleaning results at temperatures between 18 – 50°C / 64 – 122°F.
- ✦ Due to its pH neutral formulation, rinsing the stencils with DI-water is not mandatory.
- ✦ High bath loading capability with very good filterability provides long bath life and reduced maintenance costs.
- ✦ Offers excellent compatibility with material like metals , PTFE,HDPE,PVC and Nanocoating materials
- ✦ Water-based cleaner without flash point, no explosion-proof protection required.
- ✦ Non-foaming when used in spray-in-air and ultrasonic systems.
- ✦ Low odor and non-hazardous formulation.

Technical Data Sheet

Density	(g/ccm) at20°C/68°F	0.995—1.00
Surface tension	(mN/m)at25°C/77°F	15.0—17.8
Boiling point	°C/°F	>100°C/ < 203
Flash point	°C/°F	None
pH value	10g/H ₂ O	12.0
Vapor pressure	(mbar)at20°C/68°F	Approx. 23.8
Cleaning temperature	°C/°F	20-50°C/68-122°F
Solubility in water		Soluble
Application concentration	Ready-to-use	15-20% with DI water
HMIS Rating	Health-Flammability-Reactivity	0-0-0

Cleaning Process	Parts	1.Cleaning	2.Rinsing	3.Drying
Spray-in-air (inline & batch)	Stencil and misprints	INDIAQUA-SP-200	INDIAQUA-SP 200 or DI-water	Hot air or circulating air
Ultrasonic	Stencil and misprints	INDIAQUA-SP 200	INDIAQUA-SP 200 or DI-water	Hot air or circulating air
Printer	Printer	INDIAQUA –SP 200	INDIAQUA-SP 200 or DI-water	Vacuum drying

Storage

The product should be stored below 40°C in the original container having self life of 2 years from date of manufacturing . Do not freeze.

AVAILABILITY

1 LTR, 5 LTRS AND 20 LTRS JAR

MAKE IN INDIA BY :--

TANAY CHEMICALS

Khasra No – 565,566, Sector-73, Sarfabad , Noida , Gautam Buddha Nagar, Uttar Pradesh -201301 .